


FCB –MAAKOURAT IRROTETTAVILLA SIVULEVYILLÄ (DS-MALLI)



malli	kapasiteetti		paino kg	kynnet opt.	A mm	B mm	C mm	D mm	L mm	voima kN	kääntäjä
	dm <sup>3</sup>	kg									
FCB 35 DS	35	100	32	3	456	624	357	304	305	4,33	FR15-FR35
FCB 50 DS	50	150	52	4	626	895	492	390	330	8,21	FR35
FCB 50 DSF	50	150	52	4	626	895	492	390	330	8,21	FR35
FCB 100 DS	90	200	85	4	770	1100	605	480	350	9,74	FR35-FR35F
FCS 100 DSF	90	200	85	4	770	1100	605	480	350	9,74	FR35-FR35F
FCB 125 DS	125	250	134	4	840	1200	660	523	450	17,37	FR35-FR35F
FCB 125 DSF	125	250	134	4	840	1200	660	523	450	17,37	FR35-FR35F
FCB 150 DS	155	350	143	4	840	1200	660	523	550	17,37	FR35-FR35F
FCB 175 DS	175	350	152	4	840	1200	660	523	650	17,37	FR35-FR35F
FCB 200 DS	205	450	161	6	840	1200	660	523	750	17,37	FR35-FR35F
FCB 225 DS	225	450	170	6	840	1200	660	523	850	17,37	FR35-FR35F
FCB 325 DS	320	700	208	6	1040	1430	780	565	800	14,77	FR50-FR55F
FCB 350 DS	360	700	220	8	1040	1430	780	565	900	14,77	FR50-FR55F
FCB 425 DS	400	700	232	8	1040	1430	780	565	1000	14,77	FR50-FR55F
FCB 525 DS	520	1000	315	8	1200	1640	905	660	1000	15,50	FR50-FR55F
FCB 625 DS	620	1000	343	8	1200	1640	905	660	1200	15,50	FR85SXF

paine 200 bar

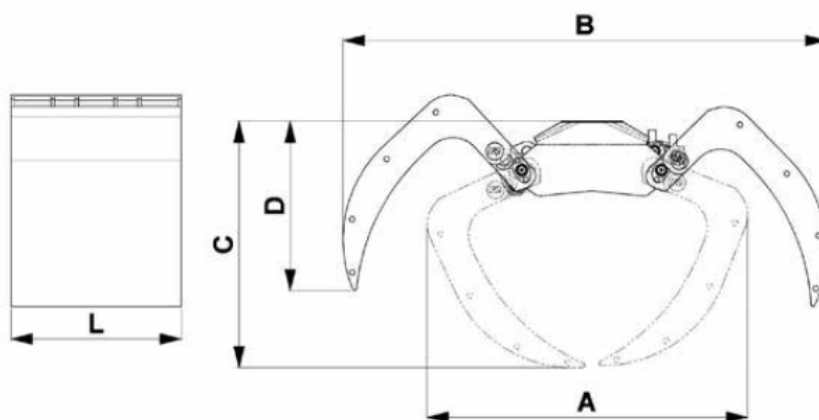

EN 2006/42/CE –standardin mukainen