




ETUKIINNITYS

FT 2V F

FT 100/A EYE

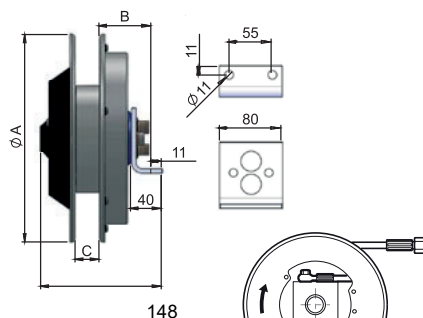


Ø 1/4" Ø 1/2" Ø 3/8"

C 27 36

MALLI	A Ø mm	B mm	KELAN MAKSIMIPITUUS			PAINO*
			Ø 1/4"	Ø 1/2"	Ø 3/8"	
FT 100/A200 2V F EYE	200	65	1500			6
FT 100/A235 2V F EYE	235	65	2000			6
FT 100/A270 2V F EYE	270	65	2500		1800	9
FT 100/A300 2V F EYE	300	65	4000		2700	9,5
FT 100/A325 2V F EYE	325	65	5000		3500	11
FT 100/A340 2V F EYE	340	65	5200		4000	12,5
FT 100/A385 2V F EYE	385	65	7000		5500	12

For hoses with eye-fitting and "Bonded seals" washers

FT 110/A




Ø 1/4" Ø 1/2" Ø 3/8"

C 27 36

MALLI	A Ø mm	B mm	KELAN MAKSIMIPITUUS			PAINO*
			Ø 1/4"	Ø 1/2"	Ø 3/8"	
FT 110/A325 2V F	325	70	4000		3000	11
FT 110/A340 2V F	340	70	4500		3500	11,7
FT 110/A370 2V F	370	70	5500		4500	12
FT 110/A385 2V F	385	70	6000		5000	13
FT 110/A400 2V F	400	70	7200		5500	13,5
FT 110/A420 2V F	420	70	8400		6500	14
FT 110/A470 2V F	470	70	11000		8000	15

FT 120/A



Ø 1/4" Ø 1/2" Ø 3/8"

C 27 36

MALLI	A Ø mm	B mm	KELAN MAKSIMIPITUUS			PAINO*
			Ø 1/4"	Ø 1/2"	Ø 3/8"	
FT 120/A470 2V F	470	80	11000		8000	23
FT 120/A500 2V F	500	80	12500		10000	24
FT 120/A520 2V F	520	80	14000		10500	24,2
FT 120/A530 2V F	530	80	14500		11000	24,5
FT 120/A560 2V F	560	80	16000		12500	25,5
FT 120/A625 2V F	625	80	21500		16000	30
FT 120/A650 2V F	650	80	23500		18000	30
FT 120/A715 2V F	715	80			22000	39
FT 120/A790 2V F	790	80			27000	40

*Paino vaihtelee riippuen letkujen halkaisijasta ja pituudesta