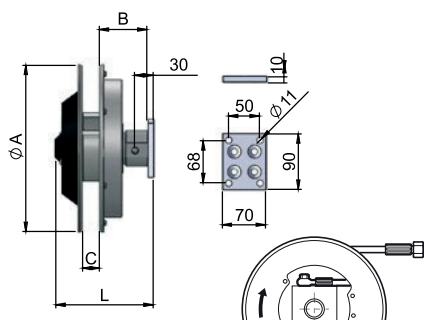


RADIAALINEN KIINNITYS

FT 2V R
FT 130/A EYE

	Ø 1/4"	Ø 1/2"	Ø 3/8"
C	27		36
L	152		160

MALLI

A


B

KELAN MAKSIMIPITUUS

PAINO*

	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	kg
FT 130/A200 2V R EYE	200	65	1500			6
FT 130/A235 2V R EYE	235	65	2000			6
FT 130/A270 2V R EYE	270	65	2500		1800	9,5
FT 130/A300 2V R EYE	300	65	4000		2700	10
FT 130/A325 2V R EYE	325	65	5000		3500	11,5
FT 130/A340 2V R EYE	340	65	5200		4000	12,5
FT 130/A385 2V R EYE	385	65	7000		5500	12,5

For hoses with eye-fitting and "Bonded seals" washers

FT 140/A

	Ø 1/4"	Ø 1/2"	Ø 3/8"
C	27	46	36
L	167	181	167

MALLI


A

B

KELAN MAKSIMIPITUUS

PAINO*

	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	kg
FT 140/A325 2V R	325	84	4000	2500	3000	11
FT 140/A340 2V R	340	84	4500	3000	3500	11,7
FT 140/A370 2V R	370	84	5500	3300	4500	12
FT 140/A385 2V R	385	84	6000	3500	5000	13,5
FT 140/A400 2V R	400	84	7200	4500	6000	14
FT 140/A420 2V R	420	84	8400	5500	6500	14,5
FT 140/A470 2V R	470	84	11000	6500	8000	16

FT 150/A

	Ø 1/4"	Ø 1/2"	Ø 3/8"
C	27	46	36
L	182	177	177

MALLI

A

B

KELAN MAKSIMIPITUUS

PAINO*


	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	kg
FT 150/A470 2V R	470	97	11000	6500	8000	23,5
FT 150/A500 2V R	500	84	12500	8000	10000	24
FT 150/A520 2V R	520	97	14000	8500	10500	24,2
FT 150/A530 2V R	530	84	14500	9000	11000	26
FT 150/A560 2V R	560	97	16000	10000	12500	27
FT 150/A625 2V R	625	84	21500	12500	16000	29
FT 150/A650 2V R	650	97	23500	14000	18000	30
FT 150/A715 2V R	715	84		17500	22000	31,5
FT 150/A790 2V R	790	97		21000	27000	33
FT 150/A920 2V R	920	126		29000		70

*Paino vaihtelee riippuen letkun halkaisijasta ja pituudesta

RADIAALINEN KIINNITYS

FT 3V R

FT 170/A EYE

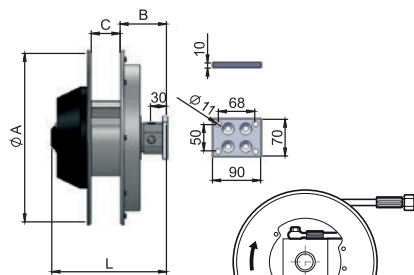

Ø 1/4" Ø 1/2" Ø 3/8"

C	40	54
L	200	210

MALLI

A

B


KELAN MAKSIMIPITUUS

PAINO*

	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	kg
FT 170/A200 3V R EYE	200	87	1500			15
FT 170/A235 3V R EYE	235	87	2000			6
FT 170/A270 3V R EYE	270	87	2500		1800	16
FT 170/A300 3V R EYE	300	87	4000		2700	16,5
FT 170/A325 3V R EYE	325	87	5000		3500	17,5
FT 170/A340 3V R EYE	340	87	5200		4000	12,5
FT 170/A385 3V R EYE	385	87	7000		5500	18,5

For hoses with eye-fitting and "Bonded seals" washers

FT 175/A



Ø 1/4" Ø 1/2" Ø 3/8"

C	40
L	147

MALLI

A


B

KELAN MAKSIMIPITUUS

PAINO*

	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	kg
FT 175/A325 3V R	325	73	4000			14
FT 175/A370 3V R	370	73	5500			15
FT 175/A385 3V R	385	73	6000			16
FT 175/A400 3V R	400	73	7200			16,5
FT 175/A420 3V R	420	73	8400			17,5
FT 175/A470 3V R	470	73	11000			18,5
FT 175/A500 3V R	500	73	12500			21,5

FT 170/A



Ø 1/4" Ø 1/2" Ø 3/8"

C	66	54
L	240	216

PAINO

A

B

KELAN MAKSIMIPITUUS

PAINO*


	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	kg
FT 170/A325 3V R	325	110		2500	3000	20
FT 170/A385 3V R	385	110		3500	5000	22
FT 170/A400 3V R	400	110		4500	6000	23
FT 170/A420 3V R	420	110		5500	6500	23,4
FT 170/A470 3V R	470	110		6500	8000	25
FT 170/A500 3V R	500	110		8000	10000	30
FT 170/A520 3V R	520	110		8500	10500	30,5
FT 170/A530 3V R	530	110		9000	11000	31
FT 170/A560 3V R	560	110		10000	12500	37
FT 170/A625 3V R	625	110		12500	16000	41
FT 170/A650 3V R	650	110		14000	18000	45
FT 170/A715 3V R	715	110		17500	22000	47
FT 170/A790 3V R	790	110		21000	26000	50,5

*Paino vaihtelee riippuen letkun halkaisijasta ja pituudesta

RADIOALINEN KIINNITYS

FT 4V R


FT 180/A EYE

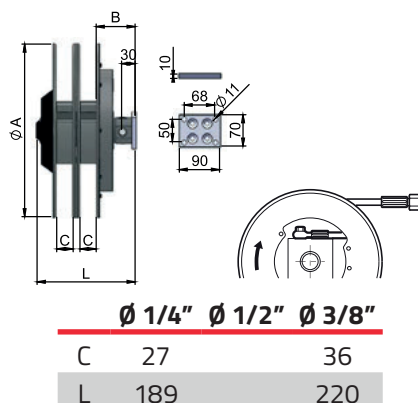

MALLI	A B		KELAN MAKSIMIPITUUS			PAINO*
	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	
FT 180/A200 4V R EYE	200	86	1500			8,5
FT 180/A235 4V R EYE	235	86	2000			6
FT 180/A270 4V R EYE	270	86	2500		1800	12,6
FT 180/A300 4V R EYE	300	86	4000		2700	14,5
FT 180/A325 4V R EYE	325	86	5000		3500	15
FT 180/A385 4V R EYE	385	86	7000		5500	16,5
FT 180/A340 4V R EYE	340	86	5200		4000	18


For hoses with eye-fitting and "Bonded seals" washers

FT 180/A

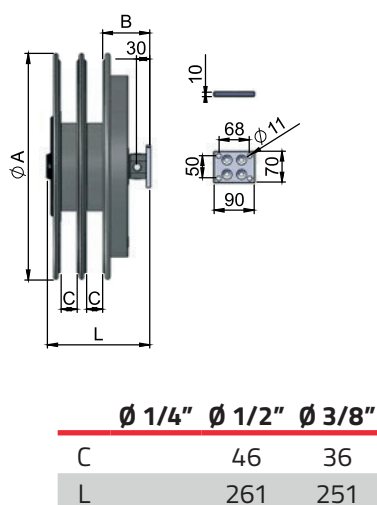

MALLI	A B		KELAN MAKSIMIPITUUS			PAINO*
	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	
FT 180/A325 4V R	325	110		2500	3000	20
FT 180/A370 4V R	370	110		3300	4500	21
FT 180/A385 4V R	385	110		3500	5000	22
FT 180/A400 4V R	400	110		4500	5500	22,5
FT 180/A420 4V R	420	110		5500	6500	23
FT 180/A470 4V R	470	110		6500	8000	24,5
FT 180/A500 4V R	500	110		8000	10000	31
FT 180/A520 4V R	520	110		8500	10500	31,5
FT 180/A530 4V R	530	110		9000	11000	32
FT 180/A560 4V R	560	110		10000	12500	38
FT 180/A625 4V R	625	110		12500	16000	41
FT 180/A650 4V R	650	110		14000	18000	42
FT 180/A715 4V R	715	110		17500	22000	43
FT 180/A790 4V R	790	110		21000	27000	44


FT 190/A CI

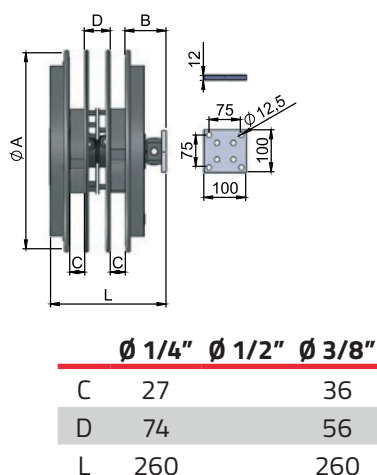

MALLI	A B		KELAN MAKSIMIPITUUS			PAINO*
	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	
FT 190/A325 4V R CI	325	100	4000		3000	25
FT 190/A385 4V R CI	385	100	6000		5000	27
FT 190/A400 4V R CI	400	100	7200		5500	28
FT 190/A420 4V R CI	420	100	8500		6500	29
FT 190/A470 4V R CI	470	100	11000		8000	30,5
FT 190/A500 4V R CI	500	97			10000	47
FT 190/A530 4V R CI	530	97			11000	49
FT 190/A560 4V R CI	560	97			12500	50
FT 190/A625 4V R CI	625	97			16000	54
FT 190/A650 4V R CI	650	97			18000	49,5
FT 190/A715 4V R CI	715	97			22000	59

*Paino vaihtelee riippuen letkun halkaisijasta ja pituudesta


RADIAALINEN KIINNITYS

FT 5V R**FT 210/A**

Ø 1/4" Ø 1/2" Ø 3/8"

C	54
C1	36

MALLI	A B		KELAN MAKSIMIPITUUS			PAINO*
	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	
FT 210/A325 5V R	325	110			3000	23
FT 210/A385 5V R	385	110			5000	26
FT 210/A400 5V R	400	110			5500	26,5
FT 210/A420 5V R	420	110			6500	27,5
FT 210/A470 5V R	470	110			8000	30
FT 210/A500 5V R	500	110			10000	37
FT 210/A530 5V R	530	110			11000	39
FT 210/A560 5V R	560	110			12500	45
FT 210/A625 5V R	625	110			16000	50

FT 220/A CI

Ø 1/4" Ø 1/2" Ø 3/8"

C	54
C1	36
L	310

MALLI	A B		KELAN MAKSIMIPITUUS			PAINO*
	Ø mm	mm	Ø 1/4"	Ø 1/2"	Ø 3/8"	
FT 220/A470 5V R CI	470	110			8000	60
FT 220/A500 5V R CI	500	110			10000	66
FT 220/A530 5V R CI	530	110			11000	67,5
FT 220/A560 5V R CI	560	110			12500	70
FT 220/A625 5V R CI	625	110			16000	74
FT 220/A650 5V R CI	650	110			22000	76,5
FT 220/A715 5V R CI	715	110			27000	81
FT 220/A790 5V R CI	790	110			18000	89

*Paino vaihtelee riippuen letkun halkaisijasta ja pituudesta