


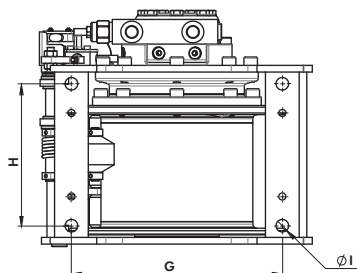


FW SX EVO

FW 60 SX - FW 220 SX

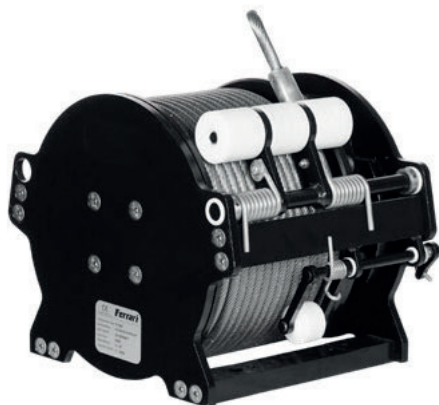


Vakiomalli:
pyörimissuunta
vastapäivään





		FW 60SX	FW 60SXL	FW 80SX	FW 80SXL	FW 100SX	FW 100SXL	FW 120SX	FW 150SX	FW 180SX	FW 180SXL	FW 220SX
1.KRS VOIMA	daN	600	600	800	800	900	900	1100	1300	1800	1800	2050
VIIM.KRS VOIMA	daN	400	400	500	500	580	580	820	850	1150	1150	1370
VAIJERIKERROKSIA	n°	6	6	6	6	5	5	5	4	5	5	5
VAIJERIN Ø	mm	6	6	6	6	7	7	7	8	9	9	10
VAIJERIN PITUUS	m	80	150	80	150	58	128	78	54	78	155	71
KIERTONOEUS	m/min	55	55	50	50	45	45	55	50	32	32	30
PAINO	kg	40	56	43	58	45	60	56	58	83	98	86
MAKSIMIVIRTAUS	l/min	36	36	36	36	36	36	45	45	60	60	60
PAINE	bar	150	150	160	160	170	170	160	170	150	150	160
MOOTTORI	cc/rev	80.3	80.3	80.3	80.3	80.3	80.3	100	100	100	100	100
MOOTT.VÄÄNTÖMOMENTTI	Nm	160	160	165	165	170	170	205	208	205	205	210
MAX VÄÄNTÖMOMENTTI RUMMULLA	Nm	805	805	814	814	820	820	1250	1270	2500	2500	2600
MAX PALUUPAINE	bar	2	2	2	2	2	2	2	2	2	2	2
VAIHEISTON VÄLITYSSUHDE		5,3	5,3	5,3	5,3	5,3	5,3	6,2	6,2	13,8	13,8	13,8
PAINE TÄYDESSÄ JARRUVAPAUTUKSESSA	bar	24	24	24	24	24	24	24	24	25	25	25
A	mm	136	320	136	320	136	320	158	158	190	372	190
B	mm	289	460	289	460	289	460	346	346	380	560	380
Ø C	mm	180	180	180	180	180	180	210	210	220	220	220
D	mm	261	261	261	261	261	261	286	286	322	322	322
E	mm	318	318	318	318	318	318	343	343	384	384	384
Ø F	mm	258	258	258	258	258	258	286	286	322	322	322
G	mm	170	170	170	170	170	170	170	170	170	364	170
H	mm	250	250	250	250	250	250	250	250	250	250	250
Ø I	mm	15	15	15	15	15	15	15	15	15	15	15

Vinssit eivät sovellu henkilöiden nostamiseen

FW 220 SXL - FW 750 SX



Vakiomalli:
pyörimissuunta
vastapäivään



		FW 220SXL	FW 250SX	FW 250SXL	FW 300SX	FW 300SXL	FW 350SX	FW 350SXL	FW 450SX	FW 450SXL	FW 550SX	FW 750SX
1.krs voima	daN	2050	2325	2325	3100	3100	3600	3600	4300	4300	5500	6500
VIIM.KRS VOIMA	daN	1370	1560	1560	2200	2200	2550	2550	2820	2820	4200	5200
VAJERIKERROKSIA	n°	5	4	4	5	5	5	5	5	5	5	4
VAJERIN Ø	mm	10	11	11	13	13	14	14	15	15	16	18
VAJERIN PITUUS	m	140	50	98	70	136	62	128	58	120	128	88
KIERTONOPEUS	m/min	30	28	28	34	34	32	32	30	30	38	36
PAINO	kg	100	87	102	129	155	136	160	140	165	340	360
MAX VIRTAAUS	l/min	60	60	60	75	75	75	75	75	75	130	130
PAINE	bar	160	180	180	175	175	185	185	195	195	260	280
MOOTTORI	cc/rev	100	100	100	100	100	100	100	100	100	45	45
MOOTT.VÄÄNTÖMOM.	Nm	210	230	230	220	220	220	220	220	220	150	160
MAX VÄÄNTÖMOMENTTI RUMMULLA	Nm	2600	2700	2700	5500	5500	5500	5500	5500	5500	12300	12300
MAX PALUU- PAINE	bar	2	2	2	2	2	2	2	2	2	2	2
VAIHTEISTON VÄLITYSSUHDE		13,8	13,8	13,8	26,8	26,8	26,8	26,8	26,8	26,8	90,7	90,7
PAINE TÄYDESSÄ JARRUVAPAUTUKSESSA	bar	25	25	25	33	33	33	33	33	33	19	19
A	mm	372	190	372	213	413	213	413	213	413	352	352
B	mm	560	380	560	495	690	495	690	495	690	700	700
Ø C	mm	220	220	220	250	250	250	250	250	250	323	323
D	mm	322	322	322	404	404	404	404	404	404	500	500
E	mm	384	384	384	470	490	470	490	470	490	580	580
Ø F	mm	322	322	322	400	400	400	400	400	400	500	500
G	mm	364	170	364	245	445	245	445	245	445	380	380
H	mm	250	250	250	360	360	360	360	360	360	410	410
Ø I	mm	15	15	15	19	19	19	19	19	19	19	19

Vinssit eivät sovellu henkilöiden nostamiseen