



FIRE WG

Sähkövinssi, hammasratasvaihteisto

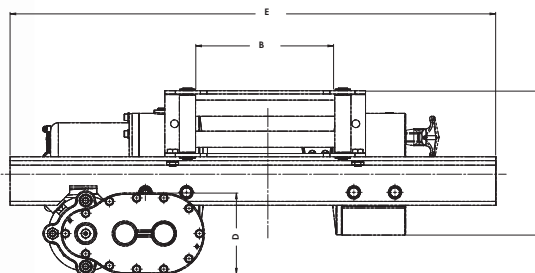

		FIRE 1000 WG*	FIRE 1300 WG*	FIRE 2.7 C WG	FIRE 2.7 M WG*	FIRE 2.7 L WG	FIRE 3.6 C WG	FIRE 3.6 M WG*	FIRE 3.6 L WG	FIRE 5.0 C WG	FIRE 5.0 M WG*	FIRE 5.0 L WG
CE EN 14492-1		X	X	X	X	X	X	X	X			
1.KRS VETO	kg	1000	1300	2700			3600			5000		
Ø VAIJERI	mm	6	6	8			10			10		
VAIJERIN PITUUS	m	20	20	25	30	40	24	30	40	24	30	40
VAIJERIN MAX PITUUS	m	36	36	39	50	65	30	32	55	30	32	55
MAX I (12/24 V)	Ah	175/90 180/90		270/135			280/140			280/140		
MAX NOPEUS	m/min	6,4	5,5	5,2			4,5			4,5		
PAINO	kg	44	44	39	40	43	39	40	43	39	40	43
A	mm	260	260	277			277			277		
B	mm	134	134	162	211	350	162	211	350	162	211	350
C	mm	190	190	193			193			193		
D	mm	125	125	90			90			90		
E	mm	430	430	750	750	820	750	750	820	750	750	820
F	mm	336	336	336			336			336		

*LISÄVARUSTE: vajeripainike

CE-VERSIOSSA (EN 14492-2):

vinssi on varustettava kuormanvalvonnalla ja lisäakulla

FIRE 1000-1300: Vajeriohjainta ei saatavissa

Vinssit: EN 2006 42 EC - EN 14492-2